

# CUPLOCK SYSTEM

Cuplock System is manufactured in accordance with

**BRITISH STANDARD BS EN 12810:2003**

## Cuplock System

- Utilize steel pipe with diameter of 48.3 mm. x thickness of 3.2-3.4 mm.

### STANDARD

ITEM	EFFECTIVE LENGTH
3.0 m. Standard	2.932 m.
2.0 m. Standard	1.955 m.
1.5 m. Standard	1.466 m.
1.0 m. Standard	0.977 m.
0.8 m. Standard	0.750 m.



### LEDGERS


ITEM	EFFECTIVE LENGTH
2.5 m. Ledger	2.640 m.
1.8 m. Ledger	1.829 m.
1.6 m. Ledger	1.514 m.
1.2 m. Ledger	1.219 m.
0.9 m. Ledger	0.914 m.
0.6 m. Ledger	0.610 m.




LEDGERS



CROSS BRACE




CUPLOCK SYSTEM (STANDARD)

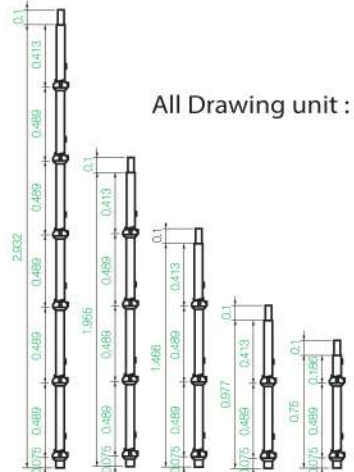

All Drawing unit : m.

BRACKET



PROTECTOR

